


LUNO Pendant

**Description**

Downlight for indoor use.

For downlighting. Can be mounted directly on ceiling or using a ceiling rose. Fully uniform diffuser with no shadows or glare. Structure material: Aluminium. Structure finish: Black. Diffuser material: Methacrylate. Diffuser finish: Matt. Warranty: 2 Years.11Product net weight (Kg): 20.6951Product width or diameter (mm): 12001Product height (mm): 12711Class I. IP: IP20. LED. No. of lampholders or LEDs: 576. LED brand: SAMSUNG. Driver brand: MEANWELL. Maximum power of light source: 146W. Colour temperature: Warm White - 3000K. Colour rendering index: 80. MacAdam Steps: 3 STEPS. Hours of life: 50.000h L80B10. UGR: 33.6. Photobiological risk: RG1. Real flux (lm): 15065. Nominal flux (lm): 16000. Lm/Real W: 93. Voltage and frequency range: 90-305 VAC. Voltage: 3.1 V. Intensity: 86 mA. Gear included: Yes, electronic. Multi-voltage gear included. Total power: 161,3. Power factor: 0.95. Dimmable gear included: 1..10V.

Finish
Black
Matt

Material
Aluminium
Methacrylate

**TECHNICAL CHARACTERISTICS****Light source**

Light source: LED SAMSUNG
Output (W): 146W
Total power consumption (W): 161,3
Color temperature: Warm White - 3000K
CRI: 80
Real Lumen: 15065
Nominal Lumen: 16000
Qty Leds: 576
Lm/Real W: 93
Life Time: 50.000h L80B10
Bin / Grup: VA o VB
MacAdam steps: 3 STEPS
UGR: 33.6
Photobiological risk: RG1

GEAR

Brand: MEANWELL
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.95
Dimming protocol: 1..10V

Luminaire

Warranty: 2 Years



Logistics

Energy Efficiency: LED A++
EAN Code: 8435381464660
Net Weight (Kg): 20.695
Weight in Kg (packaged): 23.000
Packing: 1245 x 155 x 1265
Masterbox: 1






COMPATIBLE



eBLUE:
71-5961-00-00

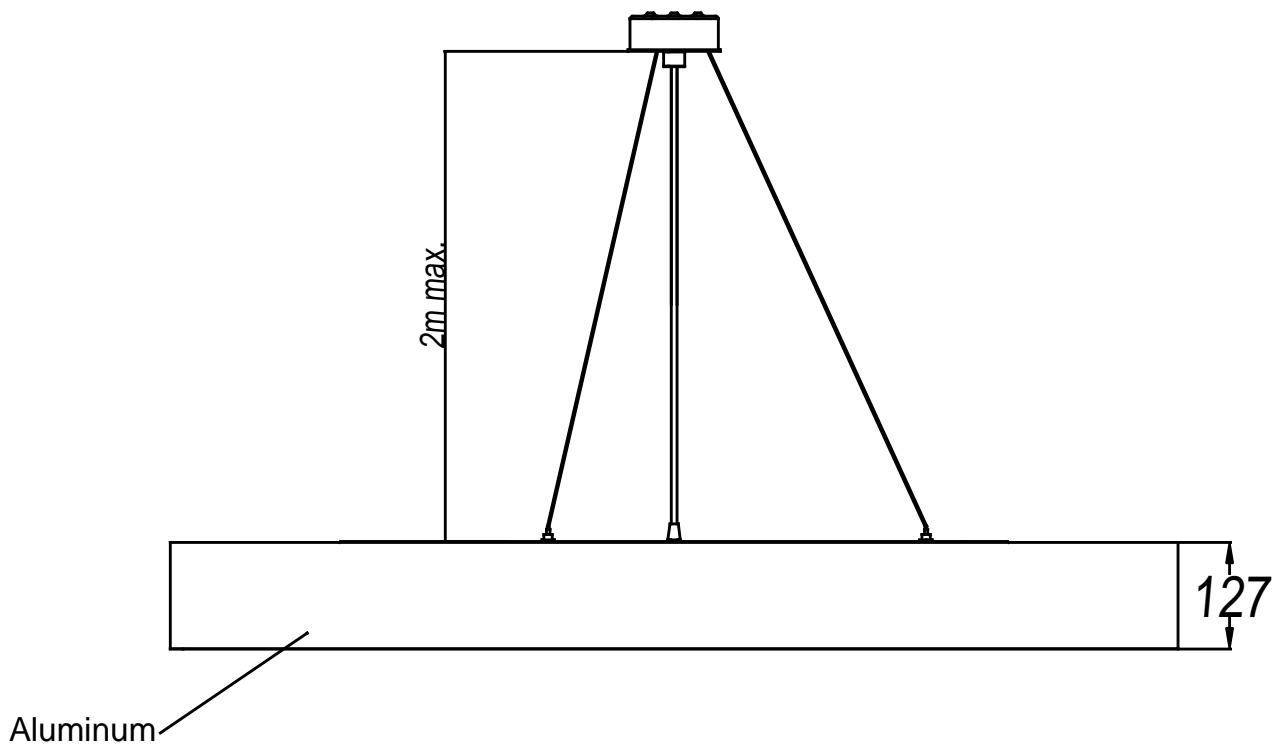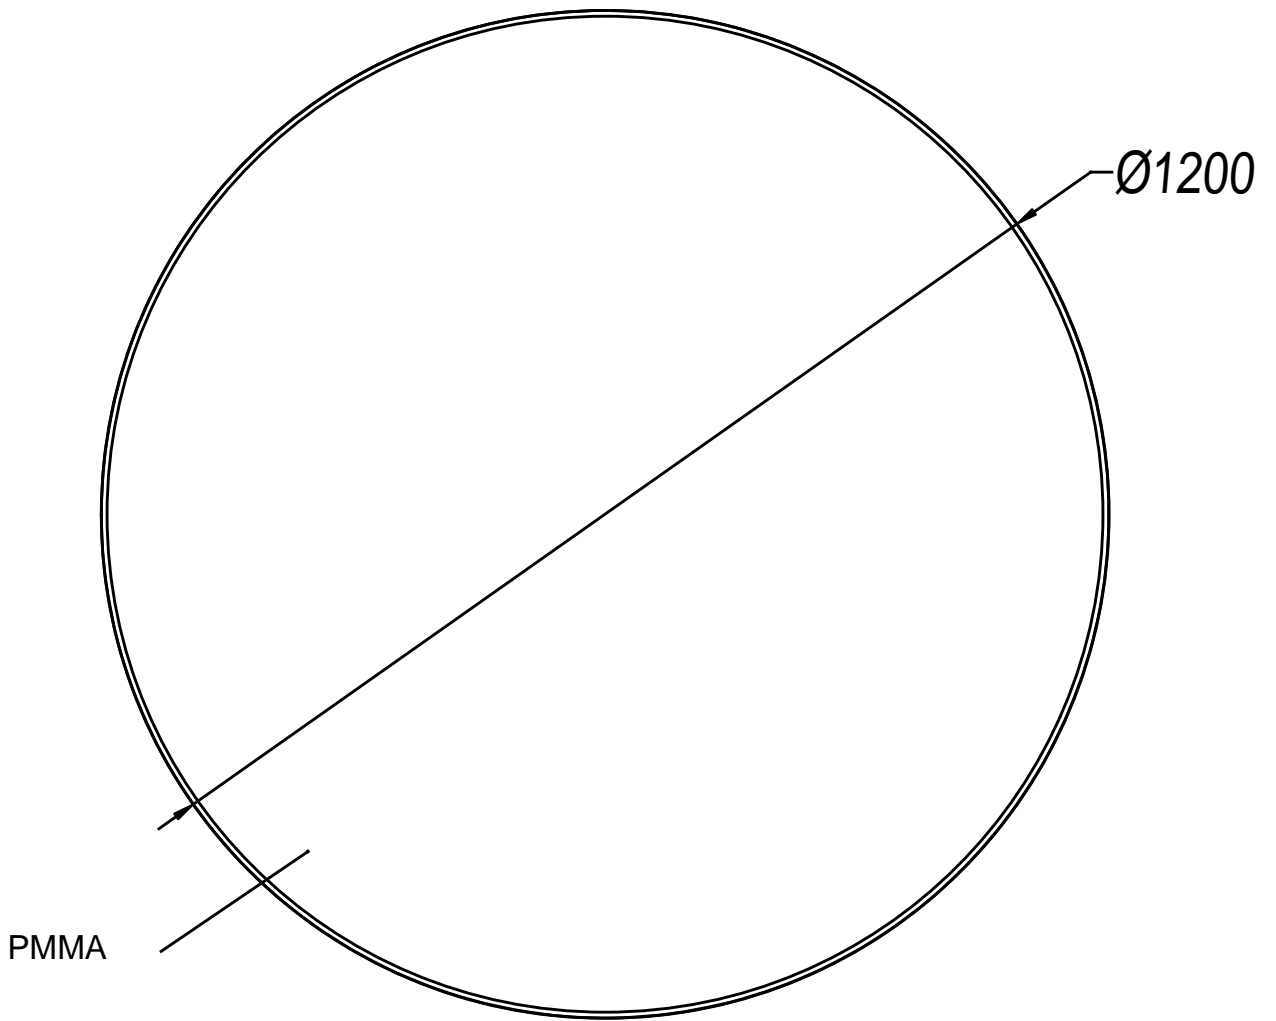

SURFACE

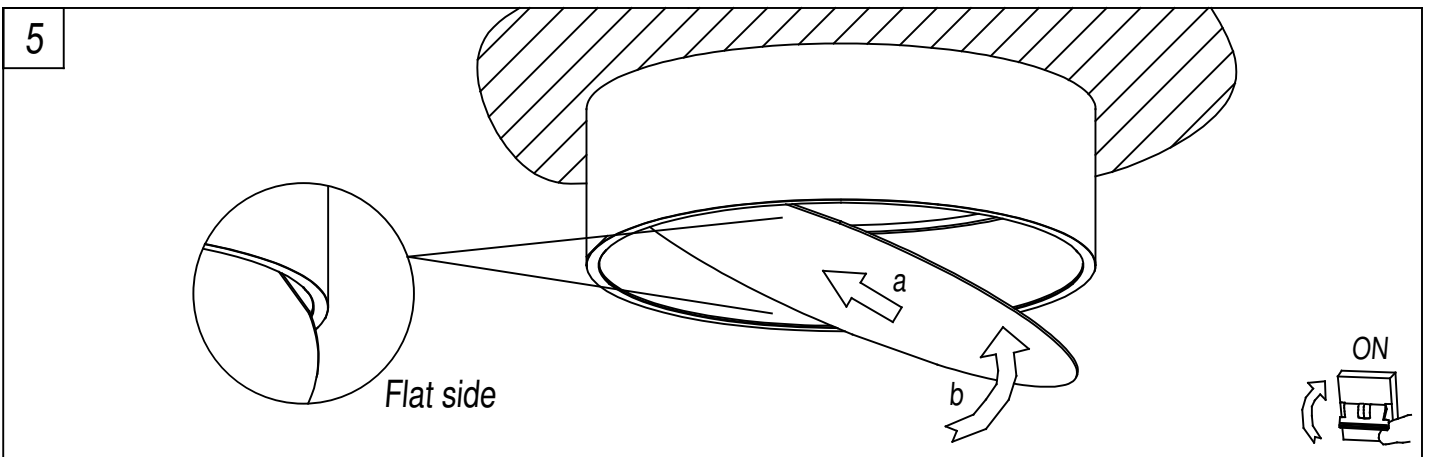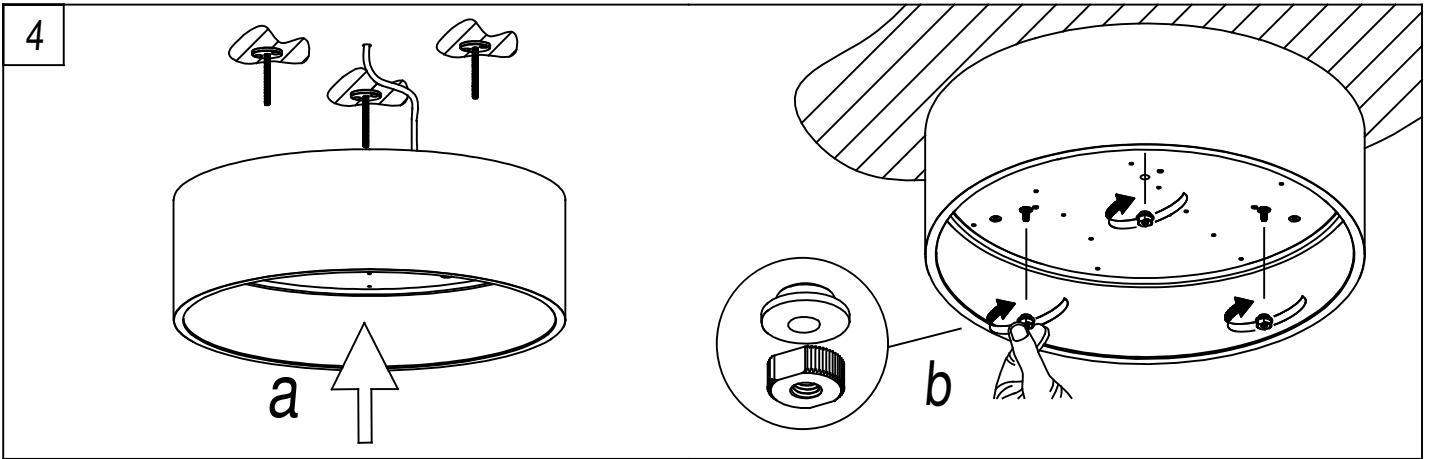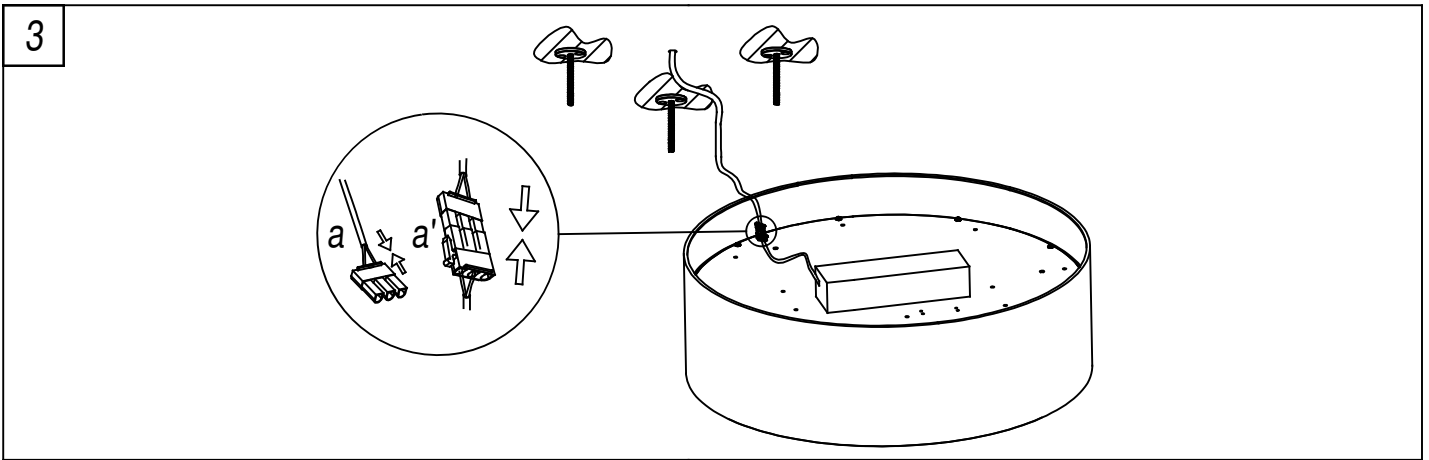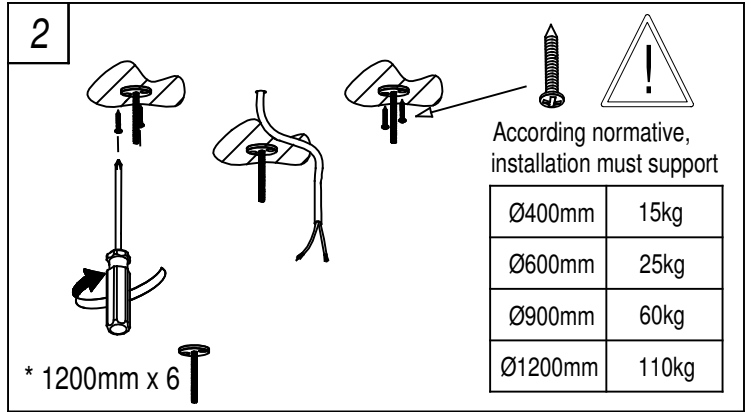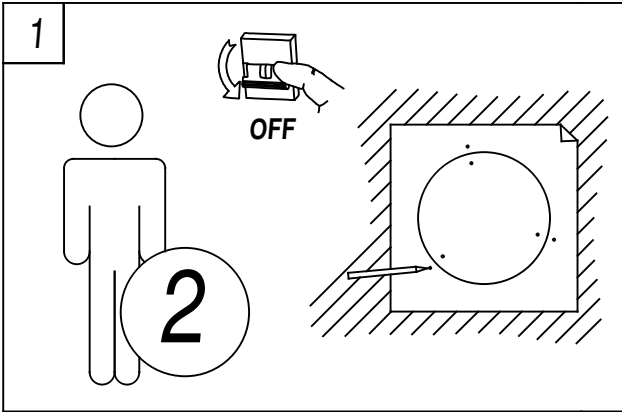

PENDANT

1

OFF

According normative, installation must support

Ø400mm	15kg
Ø600mm	25kg
Ø900mm	60kg
Ø1200mm	110kg

2

2

3

a

b

4

a

b

5

6

a

b

c

7

Flat side

a

b

8

max. 2m

ON

RECESSED

1

OFF

min. 20

min. 20

2

Ø400mm
Ø600mm
Ø900mm
Ø1200mm

2

a

b

According normative, installation must support

Ø400mm	15kg
Ø600mm	25kg
Ø900mm	60kg
Ø1200mm	110kg

max. 1.5m

3

a

4

a

5

6

5

a

b

Flat side

ON