




The photograph may not match the reference exactly. Please read the product description to identify the finish.

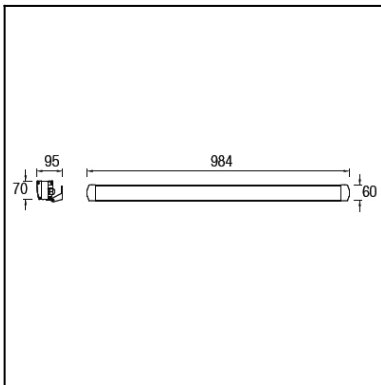

TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the horizontal axis.
IP Protection degrees:	IP65
IK Protection degrees:	IK03
Light source 1:	18 x LED Cree 34.5W Warm White - 3000K 2588 lm ^(N) CRI 80
Angle of the optics / Reflector:	40x9°
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5



MATERIALS / FINISHES

Structure material: Extruded aluminium

Diffuser material: Glass


Structure finish: Anodized

Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Led 36W 3000K



Download photometric file .ldt / .ies

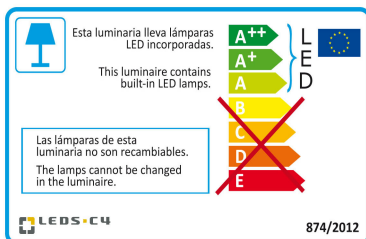

Click on image to download energy label

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.



LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.


Luminaire		Measur.		Lamp		
Code	05-9750-54-37	Code	05-9750-54-37	Code	05-9750-54-37	
Name	Aplique 18 leds 36W	Name	Aplique 18 leds 36W	Number	1	
Line	Eulumdat	Date	10-02-2014	Position		
Efficiency	100.00%	Coordinate system	CG	Total Flux	1833.86 lm	
Maximum value	11092.55 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	975 mm	Width	60 mm	Height	70 mm
Rectangular Luminous Area	Length	905 mm	Width	25 mm	Height	0 mm
Horizontal Luminous Area	0.022625 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.005473 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90			
Measurement Distance	0.00	Measurement Flux	1833.86 lm			
Operator	Asselum T2	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						


Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	05-9750-54-37	05-9750-54-37 - 36.00 W	1833.86	36.00	1
C.I.E.	95 99 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

975mm x 60mm



ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

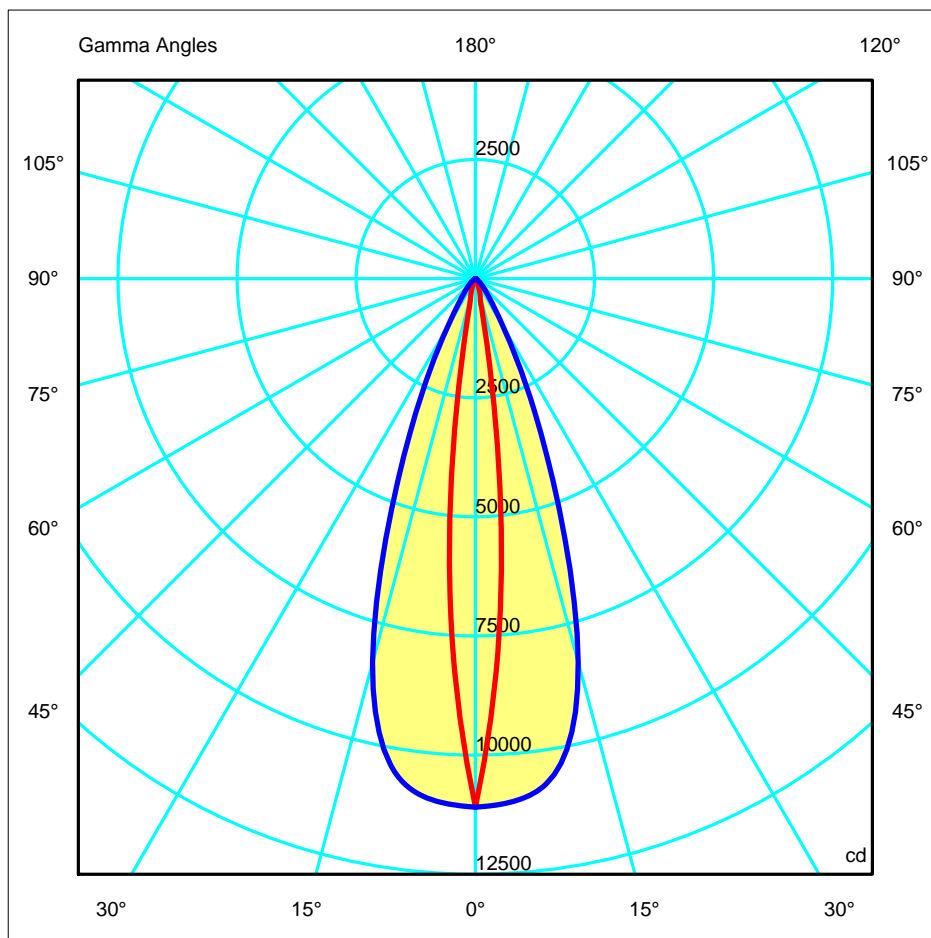





ALUMINIO
ALUMINIUM

ALUMINIO INYECTADO
INJECTED ALUMINIUM

ALUMINIO ANODIZADO
ANODIZED ALUMINIUM

CRISTAL TRANSPARENTE
TRANSPARENT GLASS

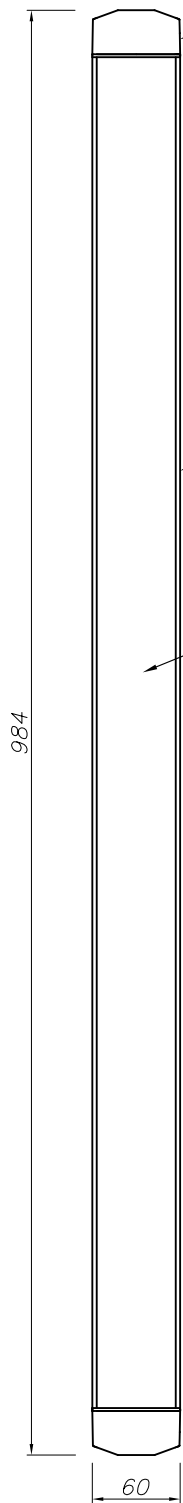

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

