




The photograph may not match the reference exactly. Please read the product description to identify the finish.

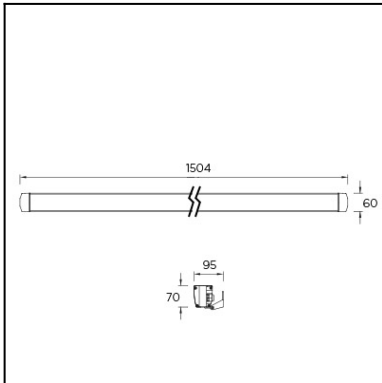


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the horizontal axis.
IP Protection degrees:	IP65
IK Protection degrees:	IK03
Light source 1:	28 x LED Cree 58W Warm White - 3000K 3407 lm ^(N) CRI 80
Angle of the optics / Reflector:	40x9°
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	4
Net Weight (Kg):	4.885
EAN:	8435381440039



[Download photometric file .ldt / .ies](#)

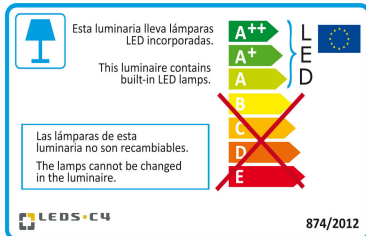

Click on image to download energy label

MATERIALS / FINISHES

Structure material: Extruded aluminium

Structure finish: Anodized

Diffuser material: Glass

Diffuser finish: Transparent

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

Luminaire

Code 05-9916-54-CL
Name Aplique 30 leds 58W



Measur.

Code 05-9916-54-CL
Name Aplique 30 leds 58W


Luminaire Flux	2659.08 lm	Luminaire Power	63.00 W	Efficacy	42.21 lm/W	Efficiency	100.00%
Lamps Flux	2659.09 lm	Maximum value	6048.75 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1504 mm	Width	60 mm	Height	70 mm
Rectangular Luminous Area		Length	1450 mm	Width	25 mm	Height	0 mm
Horizontal Luminous Area		0.036250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008770 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-03-2016		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2659.09 lm	
Operator				Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	05-9916-54-CL	05-9916-54-CL - 63.00 W	2659.09	63.00	1
C.I.E.	95 99 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

1504mm x 60mm



ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

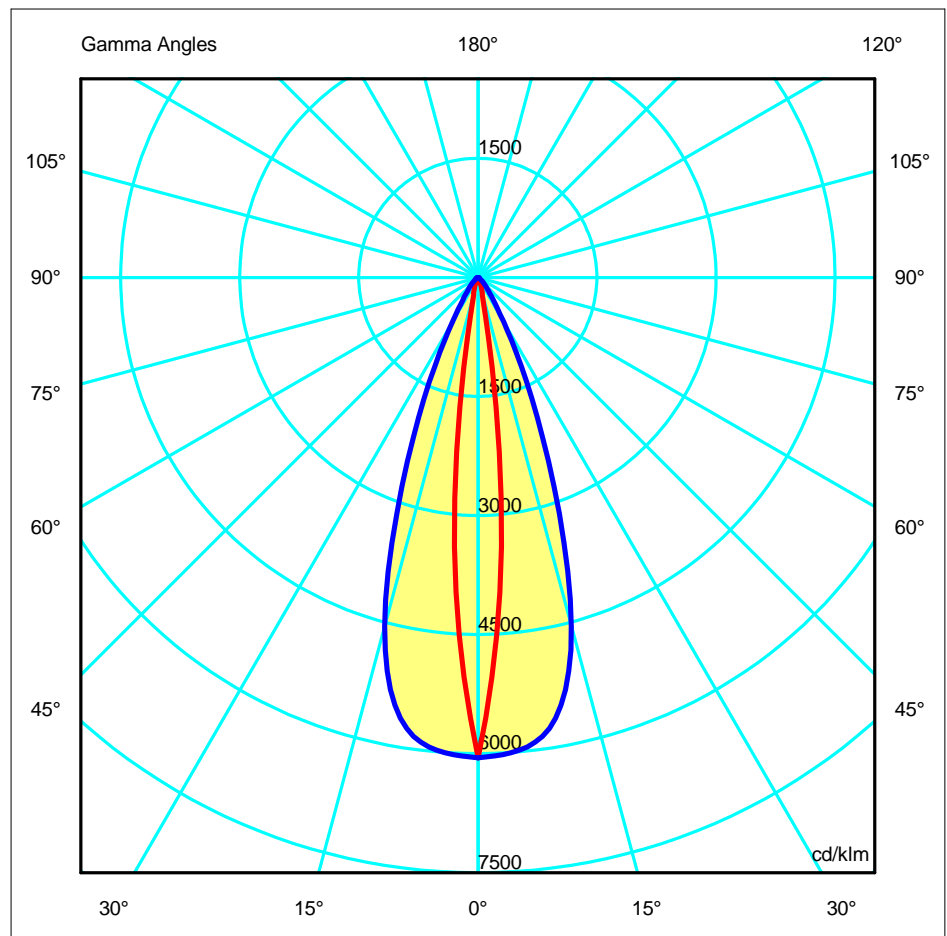

Luminaire

Code 05-9916-54-CM
 Name Aplique 30 leds 58W


Measur.

Code 05-9916-54-CM
 Name Aplique 30 leds 58W

Luminaire Flux	2954.55 lm	Luminaire Power	63.00 W	Efficacy	46.90 lm/W	Efficiency	100.00%
Lamps Flux	2954.55 lm	Maximum value	6048.75 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1504 mm	Width	60 mm	Height	70 mm
Rectangular Luminous Area		Length	1450 mm	Width	25 mm	Height	0 mm
Horizontal Luminous Area		0.036250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008770 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-03-2016		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2954.55 lm	
Operator				Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	05-9916-54-CM	05-9916-54-CM - 63 W	2954.55	63.00	1	
C.I.E.	95 99 100 100 100	D DIN 5040	A60			
F UTE	1.00 A	B NBN	BZ 1			

1504mm x 60mm



C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

