

LED Intelligent Driver

- Dimming interface: DALI, Push DIM.
- Dimming range from 0-100%, LED start at 0.1% possible.
- DALI dimming curve: Linear curve or logarithmic curve.
- 0-100% flicker-free, achieve the level of exemption assessment.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- Standby Power Loss < 0.5W
- Full protective plastic housing.
- DALI bus standard: IEC62386-101,102, 207.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor I/II/III type lamps application.


Flicker-free

IEEE 1789
Achieve the exemption level.

Dimmable:
0.1%-100%




Specification

Model	LM-75-12-G1D2	LM-75-24-G1D2	LM-100-24-G1D2
OUTPUT	Output Voltage	12Vdc	24Vdc
	Output Voltage Range	12Vdc ±0.5Vdc	24Vdc ±0.5Vdc
	Output Current	Max. 6.25A	Max. 4.17A
	Output Power	Max. 75W	Max. 100W
	Output Power Range	0~75W	0~100W
	Strobe Level	High frequency exemption level.	
	Dimming Range	0~100%, dimming depth: Max. 0.1%	
	Overload Power Limitation	≥ 102%	
	Ripple & Noise	≤ 200mV	≤ 300mV
	PWM Frequency	≤ 3600Hz	
INPUT	Dimming Interface	DALI (IEC62386), Push DIM	
	Input Voltage	220-240Vac	
	Frequency	50/60Hz	
	Input Current	Max. 0.4A/230Vac	Max. 0.5A/230Vac
	Power Factor	PF>0.97/230Vac, at full load	PF>0.98/230Vac, at full load
	THD	≤ 14% at 230Vac, at full load	≤ 12% at 230Vac, at full load
	Efficiency [typ.]	91%	92%
	Standby Power Loss	<0.5W	
	Inrush Current[typ.]	Cold start 40A at 230Vac	Cold start 45A at 230Vac
	Control surge capability	L-N:2KV	
	Leakage Current	Max. 0.5mA	
ENVIRONMENT	Working Temperature	ta: -20°C ~ 50°C tc: 80°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40°C ~ 80°C, 10~95%RH	
	Temp. Coefficient	±0.03%/°C (0-50°C)	
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
PROTECTION	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature ≥ 110°C, auto recovers.	
	Over Voltage Protection	Shut down the output when non-load voltage ≥ 13V, re-power on to recover after fault condition is removed.	Shut down the output when non-load voltage ≥ 26V, re-power on to recover after fault condition is removed.
	Over Load Protection	Shut down the output when current load ≥ 102%, auto recovers.	
	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers.	
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547	
	Strobe Test Standard	IEEE 1789	
OTHERS	Dimension	293×43×30mm(L×W×H)	
	Packing	296×44×33mm(L×W×H)	
	Weight[G.W.]	300g±10g	

* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The instantaneous surge current will be several times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.


Dimensions

Unit: mm

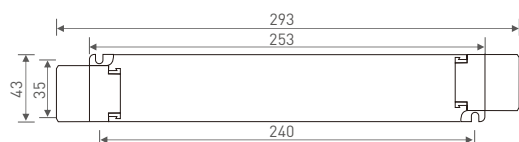


Wiring Diagram

DALI Connection



Push DIM Connection

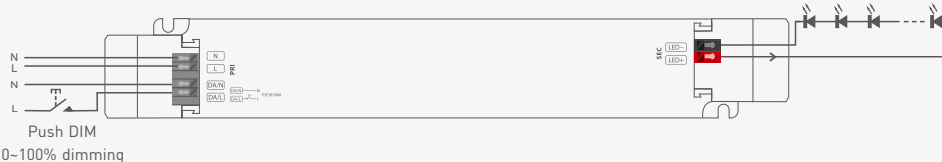


Short press to on/off, long press to DIM.


Dimming interface priority: First DALI, next Push DIM.

Application of Protective Cover

Wire pressing board:




Push the wire pressing board to fix the wire.



Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.

Uninstall protective cover:

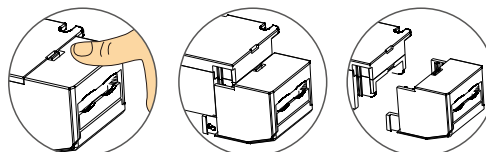

Break off the bottom left and right to remove the protective cover.





Push Dimming







Reset switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.





Relationship Diagrams

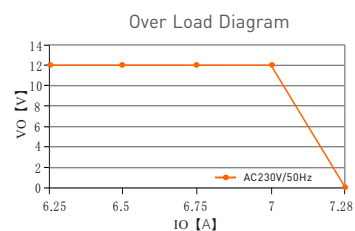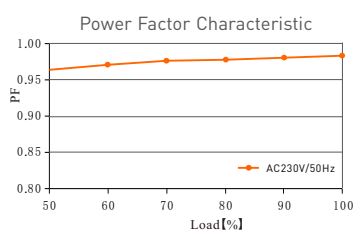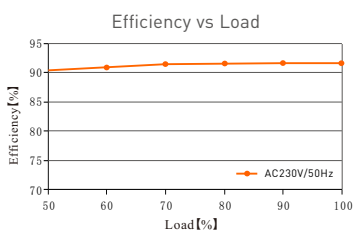

LM-75-12-G1D2

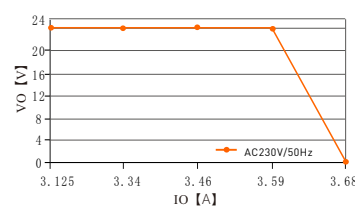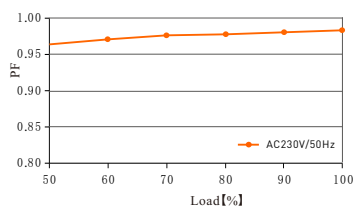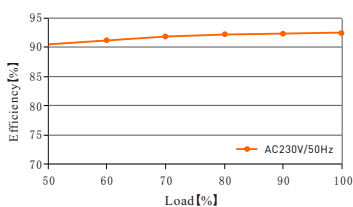

LM-75-24-G1D2

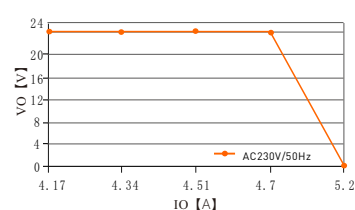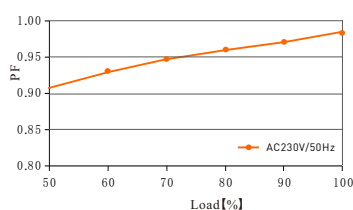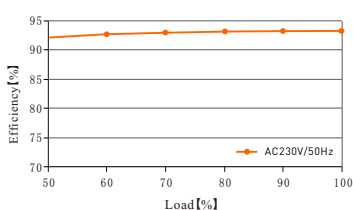

LM-100-24-G1D2