



OUT 

INVISIBLE


25-9733-05-M1

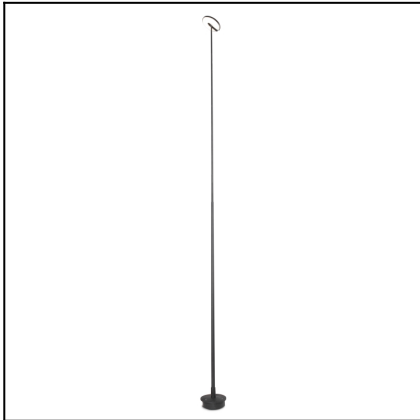

The photograph may not match the reference exactly. Please read the product description to identify the finish.

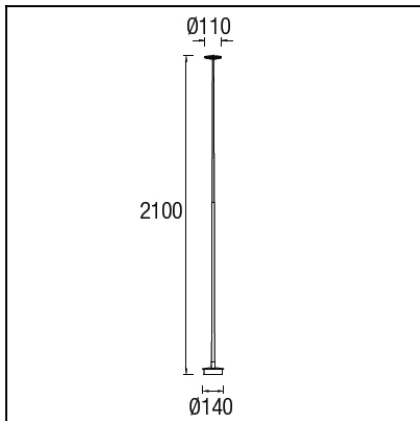

Download photometric file .ldt / .ies

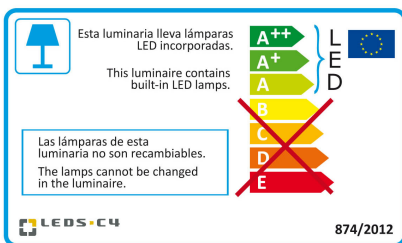

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Beacon
Adjustable:	Adjustable 355° on the horizontal axis.
IP Protection degrees:	IP54
IK Protection degrees:	IK04
Light source 1:	104 x LED 9W Warm White - 3000K 864 lm ^(N)
Total power consumption (W):	12.3W
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	2
Net Weight (Kg):	0.635
EAN:	8435381412715
Stability:	>15°



MATERIALS / FINISHES

Structure material:	High purity aluminium Fiber glass	Diffuser material:	Polycarbonate
Structure finish:	Black	Diffuser finish:	Opal

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire		Measur.		Lamp	
Code	25-9733-05-M1	Code	25-9733-05-M1	Code	25-9733-05-M1
Name	Pie INVISIBLE 9W warm white	Name	Pie INVISIBLE 9W warm white	Number	1
Line	- LEDS C4 LEDS	Date	16-09-2014	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	469.49 lm
Maximum value	159.81 cd	Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire	Diam.	110 mm	Height	20 mm	
Round Luminous Area	Diam.	105 mm	Height	10 mm	
Horizontal Luminous Area	0.008659 m2		Emitting area on Plane 180°	0.001050 m2	
Emitting area on Plane 0°	0.001050 m2		Emitting area on Plane 270°	0.001050 m2	
Emitting area on Plane 90°	0.001050 m2		Glare area at 76°	0.003114 m2	
Symmetry Type	Double Symmetrical		Maximum Gamma Angle	180	
Measurement Distance	6.44		Measurement Flux	469.49 lm	
Operator	Asselum T2		Source voltage	230.00 V	
Temperature	25.00 °C		Source current	Prc	
Humidity	50.00 %		Photocell		
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS	25-9733-05-M1	Lámpara leds 9W 3000K	469.49	9.00	1
C.I.E.	46 78 94 98 100	D DIN 5040	A31		
F UTE	0.98 E + 0.02 T	B NBN	BZ 5		


Diam=110mm





C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 2.18 %
DLOR 97.82 %
RN 2.18 %

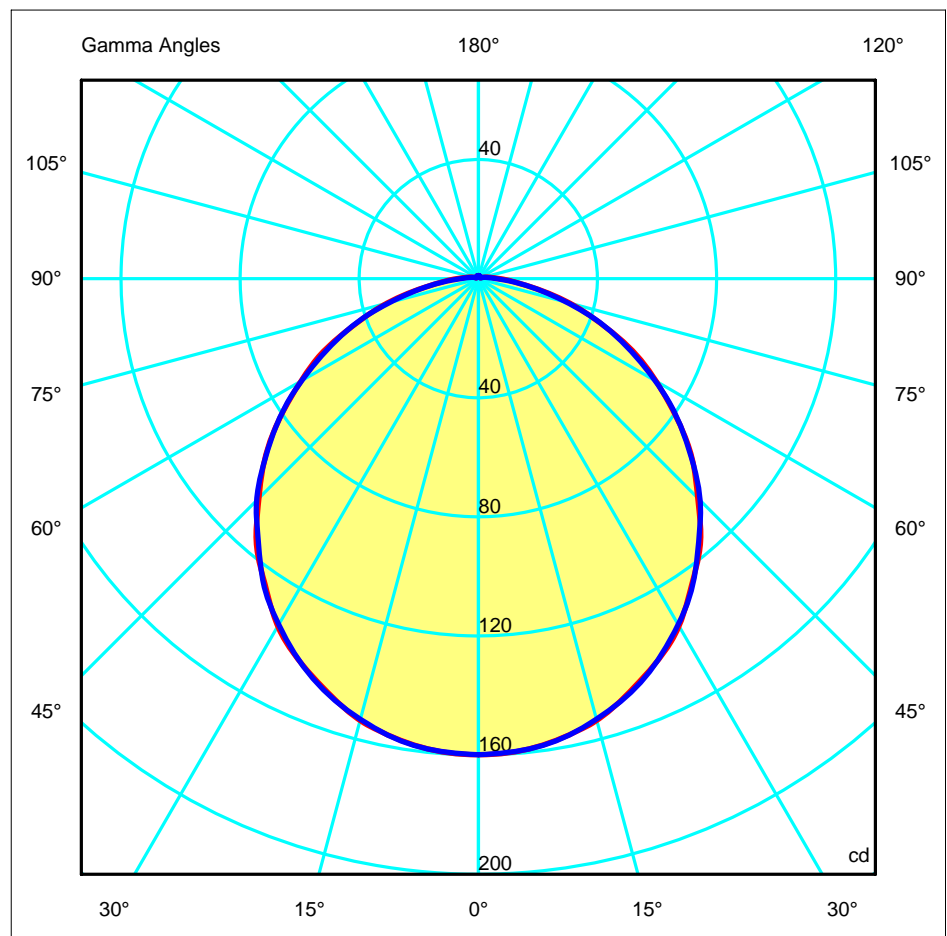

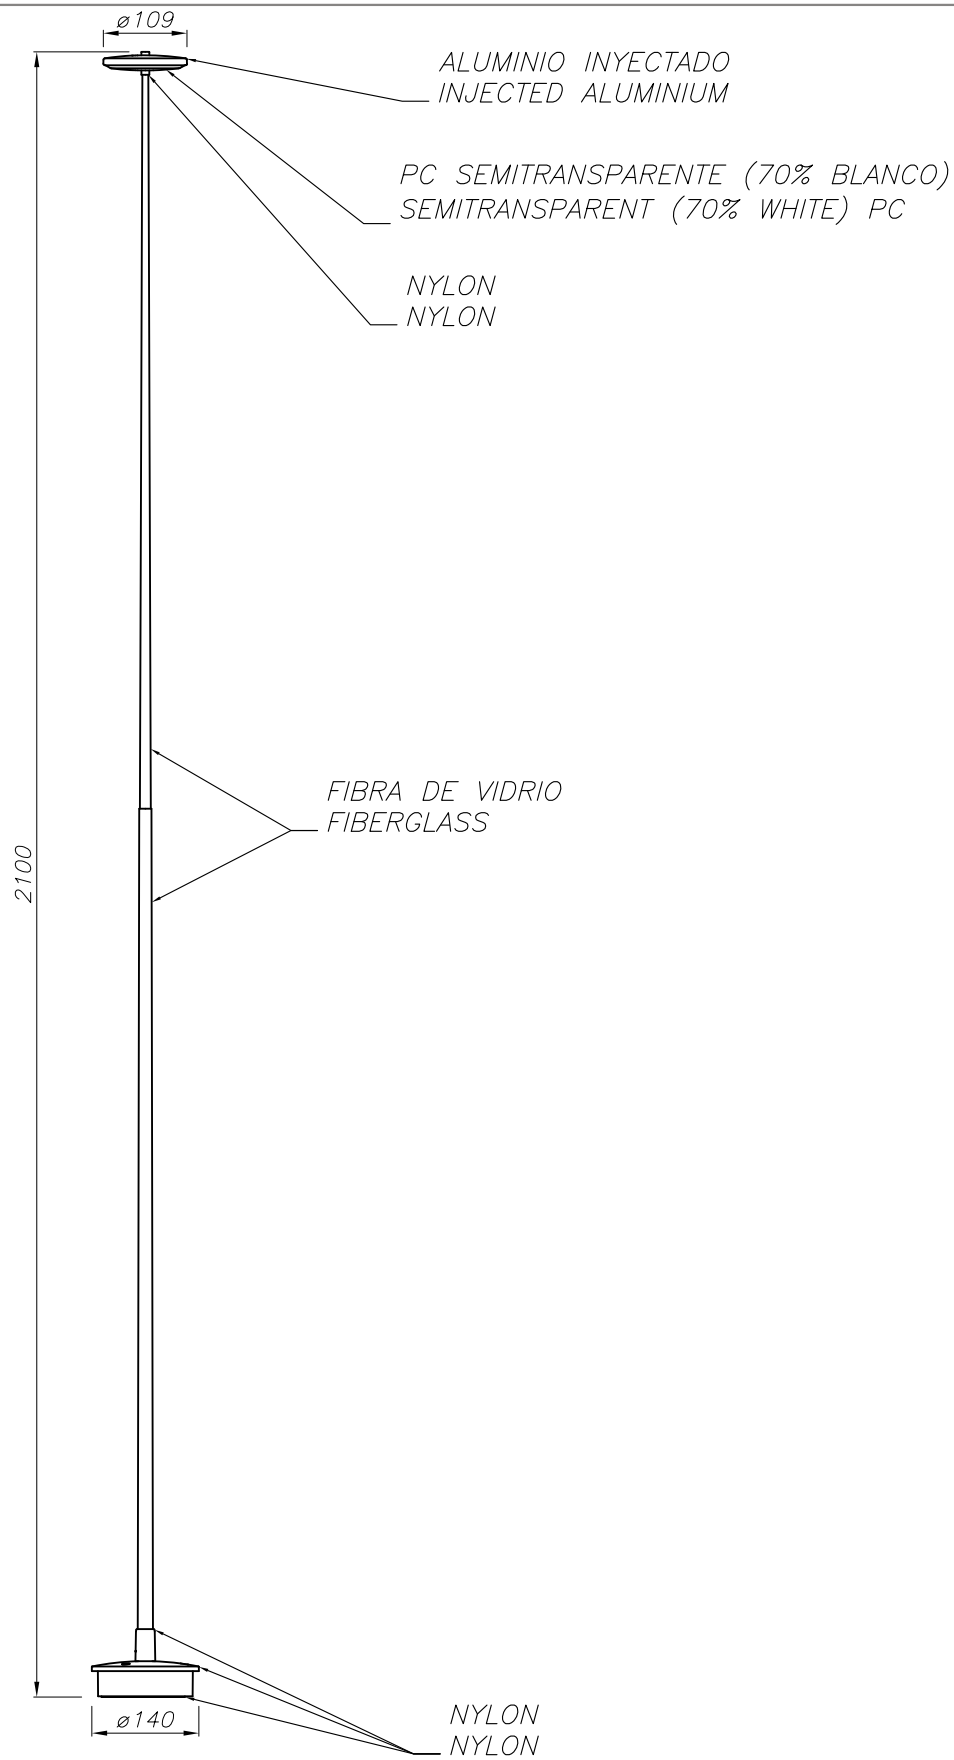

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

