

## V6 Series


# Constant Voltage LED Driver

LED恒压驱动器

## Features:

- Constant voltage driver
- Primary and secondary sides come with leads
- Built-in Active PFC
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Differential mode 4kV and common mode 6kV surge immunity
- IP67 design for indoor or outdoor
- SELV equivalent
- Protection class I

- 恒压型驱动
- 输入和输出端引线型
- 主动式PFC功能
- 输出开路, 短路, 过载和超温保护
- 浪涌保护: 线对线4KV, 线对地6KV
- IP67等级设计, 用于室内和户外使用
- 符合安全特低电压标准
- 保护等级 I

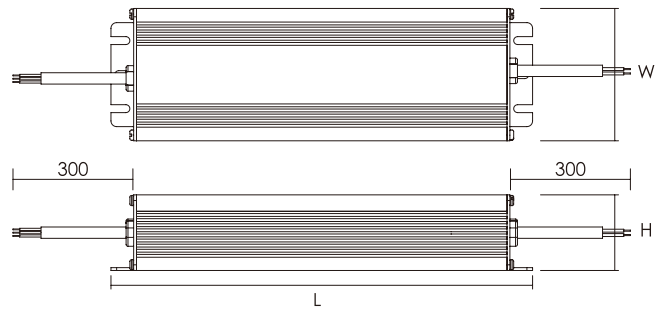

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output power 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 (mm)	Weight 重量 (g)
V6-40-12	100-240	40	12	0-3.34	0.95	86	<0.5	-20...+50	80	SELV	176x58x30.5	500
V6-40-24	100-240	40	24	0-1.67	0.95	88	<0.5	-20...+50	80	SELV	176x58x30.5	500
V6-75-12	100-240	75	12	0-6.25	0.95	86	<0.5	-20...+50	80	SELV	186x64x39	780
V6-75-24	100-240	75	24	0-3.125	0.95	88	<0.5	-20...+50	80	SELV	186x64x39	780
V6-100-12	100-240	100	12	0-8.34	0.95	86	<0.5	-20...+50	80	SELV	186x64x39	780
V6-100-24	100-240	100	24	0-4.17	0.95	88	<0.5	-20...+50	80	SELV	186x64x39	780
V6-150-12	100-240	150	12	0-12.5	0.95	90	<0.5	-20...+50	80	SELV	191x70x40	900
V6-150-24	100-240	150	24	0-6.25	0.95	91	<0.5	-20...+50	80	SELV	191x70x40	900
V6-200-12	100-240	200	12	0-16.67	0.95	90	<0.5	-20...+50	80	SELV	249x72x40	1250
V6-200-24	100-240	200	24	0-8.34	0.95	91	<0.5	-20...+50	80	SELV	249x72x40	1250
V6-240-24	100-240	240	24	0-10	0.95	91	<0.5	-20...+50	80	SELV	249x72x40	1250
V6-264-12	100-240	264	12	0-22	0.95	90	<0.5	-20...+50	80	SELV	252x90x44	1600
V6-320-24	100-240	320	24	0-13.34	0.95	93	<0.5	-40...+50	90	SELV	252x90x44	1600


**CB CE IP67**