





GES 90-1809-14-00



The photograph may not match the reference exactly. Please read the product description to identify the finish.



# Download photometric file .ldt /.ies



Click on image to download energy label

### Description

Downlights prepared for recessed ceiling installation. Housing in plaster with a steel plate fixture. Different versions available depending on form, directability and number of lamps. Possibility of completely integrating the piece in the architecture by means of thermoplastic paint. Possibility of incorporating a GU10 lampholder as an accessory.

# **TECHNICAL CHARACTERISTICS**

Type:	DOWNLIGHT RECESSED
Adjustable:	Adjustable 30°.
IP Protection degrees:	IP23
Light source 1:	1 x GU5.3 max. 50W
Voltage / Frequency:	12V/50-60Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.575
EAN:	8435381400798



#### **MATERIALS / FINISHES**

Structure material: Plaster
Structure finish: White

#### **GEAR**

Necessary equipment not included. For more information check website / catalogs / sales organization.



# **OPTIONAL ACCESORIES**

#### 71-1881-00-00



Kit for GU10 lamps, Max. 50W



56

Ø50

Ø50

#### 71-4032-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:

Aluminium

Structure finish:

Grey

Diffuser material:

Polycarbonate

Diffuser finish:

Transparent

IP20

# 71-4033-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:

Aluminium

Structure finish:

Grey

Diffuser material:

Polycarbonate

Diffuser finish:

Transparent

IP20

# 71-3885-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material:

Aluminium

Structure finish:

Grey

Diffuser material:

Polycarbonate

Diffuser finish:

Transparent

IP20

#### 71-3886-N3-M2




LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium Structure finish: Grey

Diffuser material: Polycarbonate Diffuser finish: Transparent

IP20



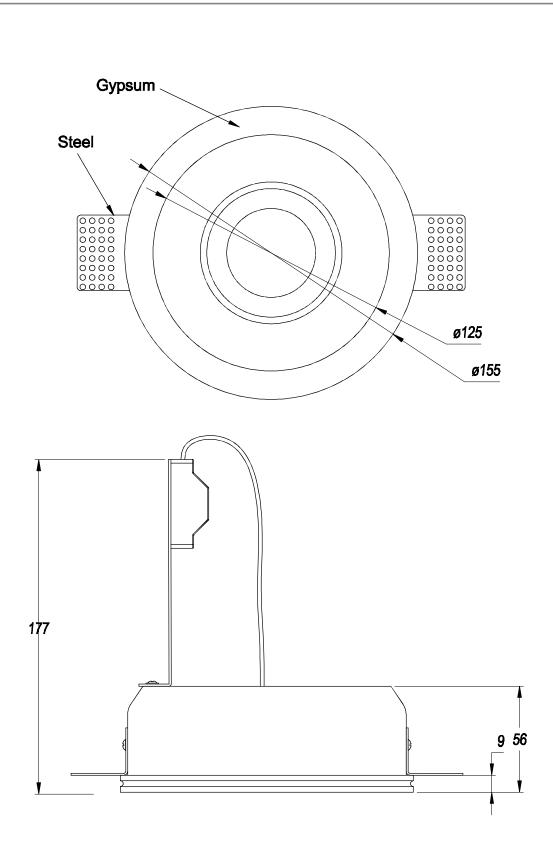



Scale 1:2



REF.	LAMP	SOCKET	₫b
90-1809	QR-CBC51 MAX 35W	GX5.3	Ø160mm

