




The photograph may not match the reference exactly. Please read the product description to identify the finish.

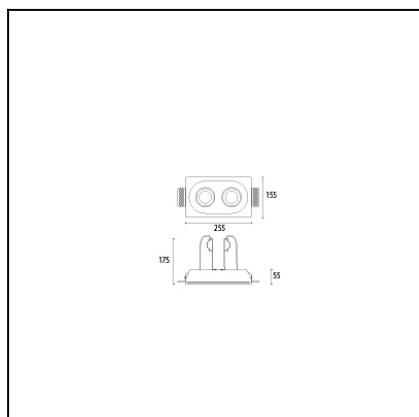

Description

Downlights prepared for recessed ceiling installation. Housing in plaster with a steel plate fixture. Different versions available depending on form, directability and number of lamps. Possibility of completely integrating the piece in the architecture by means of thermoplastic paint. Possibility of incorporating a GU10 lampholder as an accessory.

TECHNICAL CHARACTERISTICS

| | |
|------------------------|----------------------|
| Type: | DOWNLIGHT RECESSED |
| Adjustable: | Adjustable 30°. |
| IP Protection degrees: | IP23 |
| Light source 1: | 2 x GU5.3 max 50W |
| Voltage / Frequency: | 12V/50-60Hz |
| Warranty (Years): | 2 |
| Units per box: | 8 |
| Net Weight (Kg): | 1.425 |
| EAN: | 8435381400804 |



MATERIALS / FINISHES


Structure material: Plaster

Structure finish: White

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies

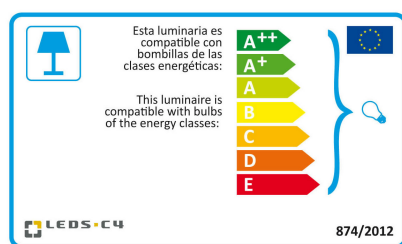


Click on image to download energy label

71-1881-00-00



Kit for GU10 lamps, Max. 50W



71-4032-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20

71-4033-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20

71-3885-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20




71-3886-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

| | |
|----------------------------|---------------|
| Structure material: | Aluminium |
| Structure finish: | Grey |
| Diffuser material: | Polycarbonate |
| Diffuser finish: | Transparent |


IP20

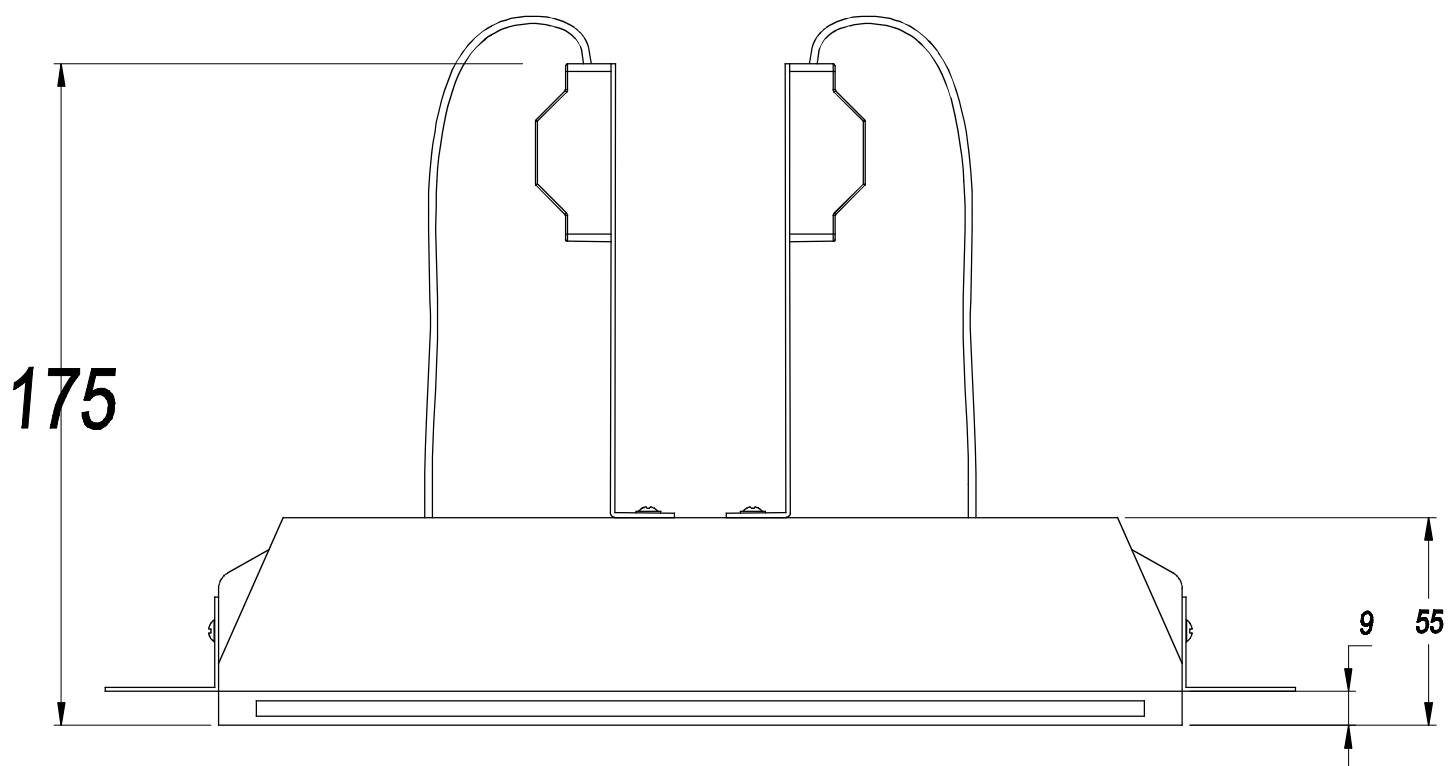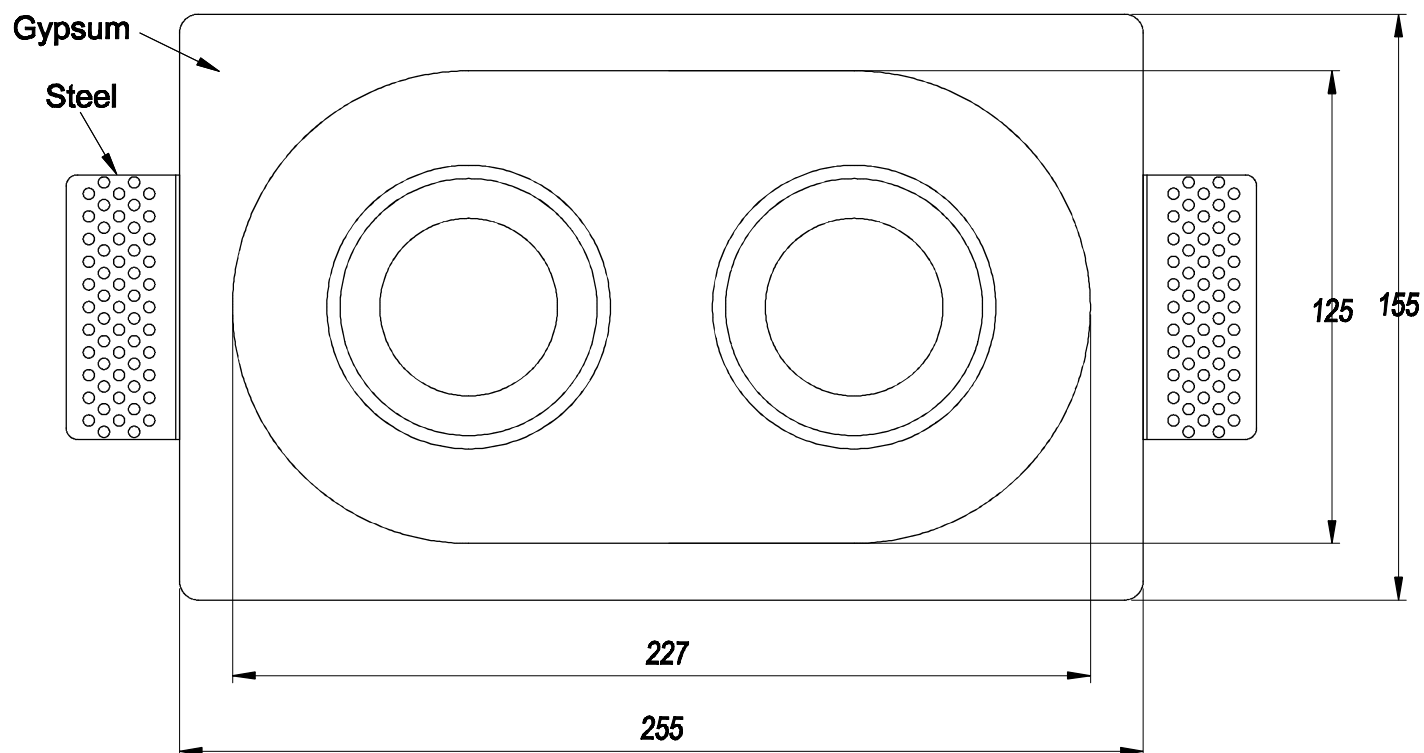

260x160 mm

Scale 1:2

10-11-14

| REF. | LAMP | SOCKET |  |
|---------|--------------------|--------|---|
| 90-1813 | 2xQR-CBC51 MAX 35W | GX5.3 | 260x160mm |

