



Vivo Spot 1T-Spot

Vivo spot (1T), jet black (RAL9005)/golden cuff - PHASE CUT dimmable

NOR DESIGN

NorDesign AS
www.nordesign.no / tlf: 73 84 95 50

Art. nr. 160123605v2
GTIN 7070952127981

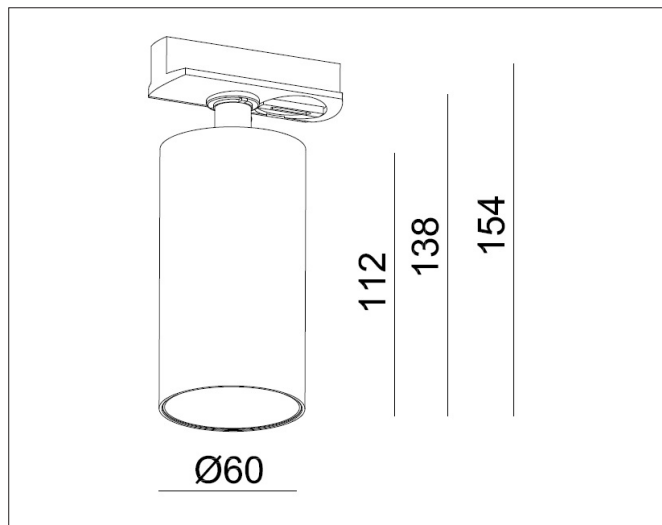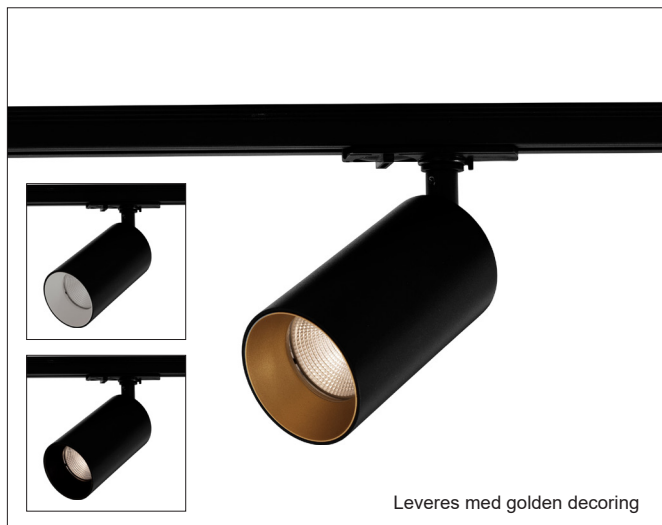

Klassisk tubeformet spotlight for 1-tenning. Spotten har utskiftbar reflektor med ulike spredningsvinkler, samt utskiftbar decoring.

- Tiltbar 90°
- Roterbar 350°
- Dimbar fase avsnitt

Tilbehør:

- 364490005 (sort)
- 364490006 (hvit)
- 364490034 (golden)



- 660122500 (25°)
- 660125000 (50°)



PRODUKT

Total lumen (lm)	1085lm
Total forbruk (W)	12,2W
Total effekt (lm / W)	89lm/W
Materiale produkt	Aluminium
Materiale avdekning	Polykarbonat
Farge produkt	Sort (Jet black RAL9005)
Farge avdekning	Transparent
Type optikk	Linse + reflektor
Type lakk	Powder coating
IP - grad	20
Beskyttelsesklasse	I
Strålevinkel (grader)	36°
Lysstråling	Retningsstyrt

EL-DATA

Min. spenning inn (V)	220V
Maks. spenning inn (V)	240V
Min. frekvens (Hz)	50Hz
Maks. frekvens (Hz)	60Hz
Type spenning (AC / DC)	AC
Power Factor	0,95
Sikring: maks. på 16A B	200
Sikring: maks. på 16A C	200
Dimbar	Fase avsnitt
Flimmerfri	Ja
	✓ SVM (≤ 0,4)
	✓ Pst LM (≤ 1,0)

LYSKILDE

Lyskilde antall (stk.)	1
Lyskilde navn/ modell	Bridgelux V10c Array
Lysfarge (Kelvin)	2700K
CRI / RA	90
Levetid 50.000T	L70B50
Energiklasse	F

TILKOBLING / MONTASJE

Tilkoblingstype	Adapter for 1T-skinne
Kompatibel med	Vox 1-tenning skinnesystem